

# KEYBOARD 1

Experience the CliqTec KEYBOARD 1, offering the maximum in hygiene, comfort, and efficiency. Elevate your medical workspace with this essential input device, designed to meet the unique demands of healthcare professionals.



## Clean Function

While cleaning, the keyboard can be conveniently locked with the Clean Function to prevent accidental data entry, ensuring data accuracy and integrity.



## Anti-Residue Design

The keyboard's sloping design (27 mm height at the back; 15 mm at the front) allows cleaning fluids to run off, effectively channeling them away to prevent residue buildup and minimize bacteria and dirt accumulation.



## Easy Cleaning

With a silicone surface fully covering the keyboard, spills, debris, and bacteria can be swiftly and effortlessly wiped away. The slightly elevated keys and sloping design further ensure a pristine work surface at all times.



## Waterproof

Fully sealed with an IP68 rating, the keyboard is protected against dust, dirt, and liquid ingress – making it ideal for even the most demanding environments.



## Enhanced Typing Experience

The slightly elevated keys are easy to distinguish by touch. Enjoy smooth, precise keystrokes with superior tactile feedback from the switches for comfortable and efficient typing.



## Durability

Built from high-quality, disinfectant-resistant materials, the keyboard is exceptionally durable and reliable for demanding medical use.



## Specifications


# KEYBOARD 1

### Product features

Protection	IP68
Connection	Wired (USB) – cabel length: 1800 mm / Wireless
Color	White
Keyboard layout	DE / NOR / BE / US / GB / IT / ES – further layouts on demand
Compatibility	All operating systems supporting USB keyboards
Number of buttons	105 slightly elevated keys
LED status display	Num-Lock, Caps-Lock, Scroll-Lock, Clean-Function

### Technical specifications

Weight	850 g
Dimensions (W × D × H)	444 × 140 × 15 – 27 mm
Storage temperature	-20 °C to +55 °C
Operating temperature	0 °C to +45 °C
Input voltage range	5 V (DC) ± 5 %
Max current consumption	Less than 100 mA
Approval and compliance	FCC / CE / RoHS / REACH / EN60601-1-2:2015
Warranty	24 months

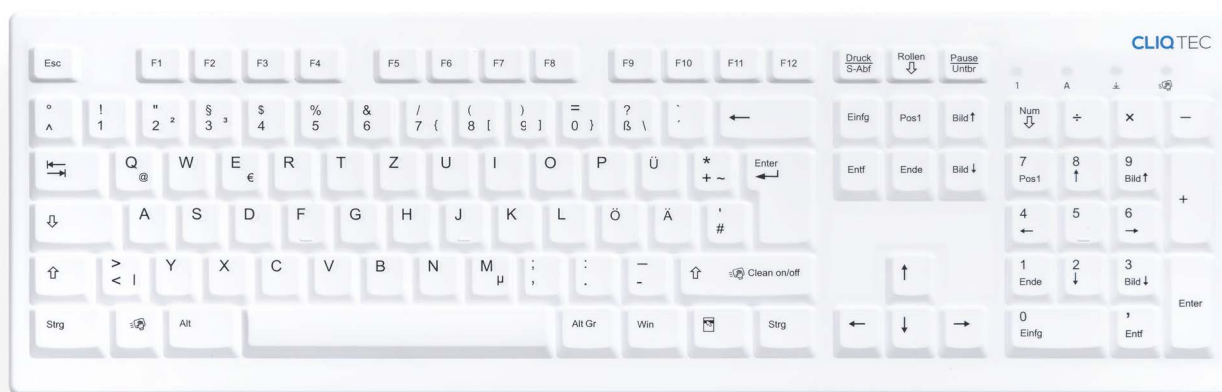

**Cliq Technology GmbH**

Absberggasse 27/7.3  
1100 Vienna  
Austria

[www.cliqtec.eu](http://www.cliqtec.eu)  
[office@cliqtec.eu](mailto:office@cliqtec.eu)  
+43 650 680 33 94