

# SafeDesk

Wherever sensitive data meets shared workspaces, every unattended screen is an open door to unauthorized access. The CliqTec SafeDesk is a radar-based presence sensor that locks your workstation automatically when you leave – without logging you out. No camera, no tracking, GDPR compliant by design.



## Automated Data Protection

Automatically locks the screen when the user leaves, eliminating the most common security gap: the unattended PC. Protects patient records, financial data, and confidential information – without depending on users to remember.



## Privacy by Design

No tracking, no data collection, no camera, no personal identification. The radar sensor detects presence only, without identifying or recognizing individuals. Fully compliant with GDPR and compatible with internal IT security policies.



## Session Continuity

Locks the screen without logging the user out. Active applications, open sessions, and unsaved work remain intact.

Additionally, the integrated RFID sensor enables fast, contactless authentication to unlock the workstation.



## Plug & Play

Connects via USB and works immediately. SafeDesk requires no drivers, no software installation, and no IT deployment overhead.



## Easy Mount

The included self-adhesive L-profile bracket allows tool-free installation in seconds and fits unobtrusively into any workspace.



## Fine-Tuning

Detection distance and lock delay can be optionally adjusted to match your workspace layout and workflow through the SafeDesk software.

## Specifications


# SafeDesk

### Product features

|                 |                                                                                  |
|-----------------|----------------------------------------------------------------------------------|
| Connection      | Wired (USB 2.0, Type-A)                                                          |
| Cable length    | 1800 mm                                                                          |
| Color           | Black                                                                            |
| Compatibility   | Windows 8, 10 and 11                                                             |
| Lock delay      | 5 – 60 seconds                                                                   |
| Detection zones | Zone 1: 0.5 m   Zone 2: 0.9 m   Zone 3: 1.6 m  <br>Zone 4: 2.0 m   Zone 5: 2.5 m |

### Technical specifications

|                             |                                   |
|-----------------------------|-----------------------------------|
| Weight                      | 70 g                              |
| Dimensions (W × D × H)      | 75 × 35 × 53 mm                   |
| Storage temperature         | -40 °C to +55 °C                  |
| Operating temperature       | 0 °C to +45 °C                    |
| Presence sensor             | 60 GHz mmWave radar               |
| RFID reader                 | Dual-band (13.56 MHz and 125 kHz) |
| Input voltage range         | 5 V (DC) ± 5 %                    |
| Average current consumption | ~ 100 mA                          |
| Max current consumption     | 500 mA                            |
| Warranty                    | 24 months                         |
| Norms                       | CE, FCC                           |

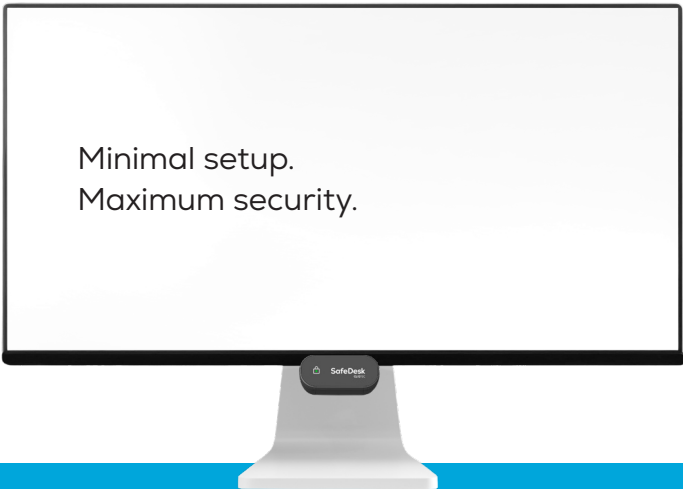

Minimal setup.  
Maximum security.

**Clia Technology GmbH**  
Absberggasse 27/7.3  
1100 Vienna  
Austria

[www.cliqtec.eu](http://www.cliqtec.eu)  
[office@cliqtec.eu](mailto:office@cliqtec.eu)  
+43 650 680 33 94